THOMAS BENJAMIN ARCHITECTURAL FLOORING



www.tbflooring.com - info@tbflooring.com

Tel: 1-562-236-5744 -




White Oak 11002 (Premium Grade shown)

STANDARD SPECIFICATIONS

Call-out (please use this exact wording when ordering or specifying)	Thomas Benjamin White Oak 11002
Standard Plank Size	5/8" thick x 8" wide x RL to 10'
Standard Wear-Layer Thickness	4mm +/- o.5mm
Species	American White Oak (Quercus alba)
Grade	Premium Grade (other grades available)
Core Construction	100% Select Birch Veneer - 100% exterior-grade adhesives
Finish	8 layers UV-cured urethane with ceramic hardeners
Texture	Subtly Brushed
LEED Points Available	Yes – as many as 4 LEED Points available
Urea Formaldehyde Content	o% added Urea-Formaldehyde, CARBII compliant
VOC Content	o% Volatile Organic Compounds
FloorScore Certified?	Vos this product is Floors core Cortified
riodiscole cel tillea.	Yes, this product is FloorScore Certified
FSC Certified?	This product is available FSC Certified
FSC Certified?	This product is available FSC Certified

CUSTOM OPTIONS

Custom Color	Unlimited custom color options
Custom Dimensions	Options for custom plank & wear-layer thickness, widths & lengths
Custom Finish	Many alternative finish options including Akzo Ceramic, WOCA and Rubio European Oil finishes in a variety of glosses and build levels
Custom Texture	Brushing, sawmarking and a variety of hand-sculpting techniques
Fire Treatment	Can be treated to ASTM E84 Class A / I
Pattern Options	Herringbone, chevron & parquet patterns available

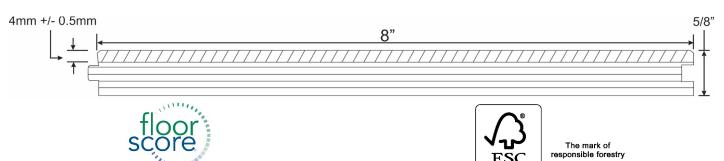

CERTIFIED BY
SCS Global Services

FSC® C155330