




White Oak 11009 (Premium Grade shown)

STANDARD SPECIFICATIONS

| | |
|---|--|
| Call-out (please use this exact wording when ordering or specifying) | Thomas Benjamin White Oak 11009 |
| Standard Plank Size | 5/8" thick x 8" wide x RL to 10' |
| Standard Wear-Layer Thickness | 4mm +/- 0.5mm |
| Species | American White Oak (<i>Quercus alba</i>) |
| Grade | Premium Grade (other grades available) |
| Core Construction | 100% Select Birch Veneer - 100% exterior-grade adhesives |
| Finish | 8 layers UV-cured urethane with ceramic hardeners |
| Texture | Subtly Brushed |
| LEED Points Available | Yes – as many as 4 LEED Points available |
| Urea Formaldehyde Content | 0% added Urea-Formaldehyde, CARBII compliant |
| VOC Content | 0% Volatile Organic Compounds |
| FloorScore Certified? | Yes, this product is FloorScore Certified |
| FSC Certified? | This product is available FSC Certified |
| Structural Warranty, Light Commercial | 10 year Limited Warranty (see complete warranty for details) |
| Finish Warranty, Light Commercial | 3 year Limited Warranty (see complete warranty for details) |
| Country of Origin | Made in the U.S.A. |

CUSTOM OPTIONS

| | |
|-------------------|---|
| Custom Color | Unlimited custom color options |
| Custom Dimensions | Options for custom plank & wear-layer thickness, widths & lengths |
| Custom Finish | Many alternative finish options including Akzo Ceramic, WOCA and Rubio European Oil finishes in a variety of glosses and build levels |
| Custom Texture | Brushing, sawmarking and a variety of hand-sculpting techniques |
| Fire Treatment | Can be treated to ASTM E84 Class A / I |
| Pattern Options | Herringbone, chevron & parquet patterns available |

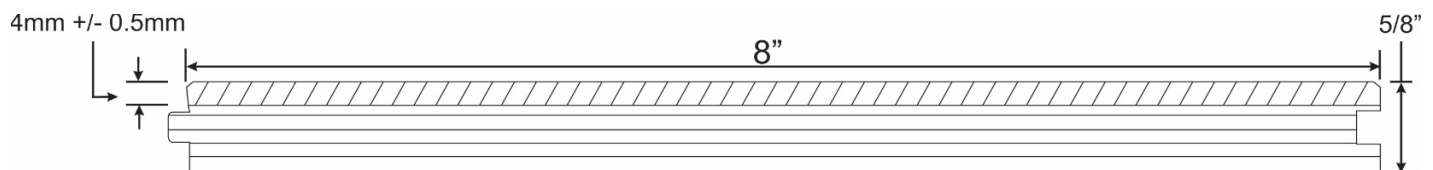

The mark of
responsible forestry
FSC® C155330

Available upon request